

TEST VOLTAGE:

BASIS FOR DATA: AB = 15% Power Factor

LITTELFUSE, INC.
CHICAGO, IL. USA


PEAK LET-THRU CHARACTERISTIC CURVES

FUSE CATALOG NUMBER:

JTD & JTDID 30A - 600A

DRAWN BY: LLL
DATE: 09/23/2019
REVISION: D

DRAWING NO: SHEET 2 OF 6
FCC05-JTD

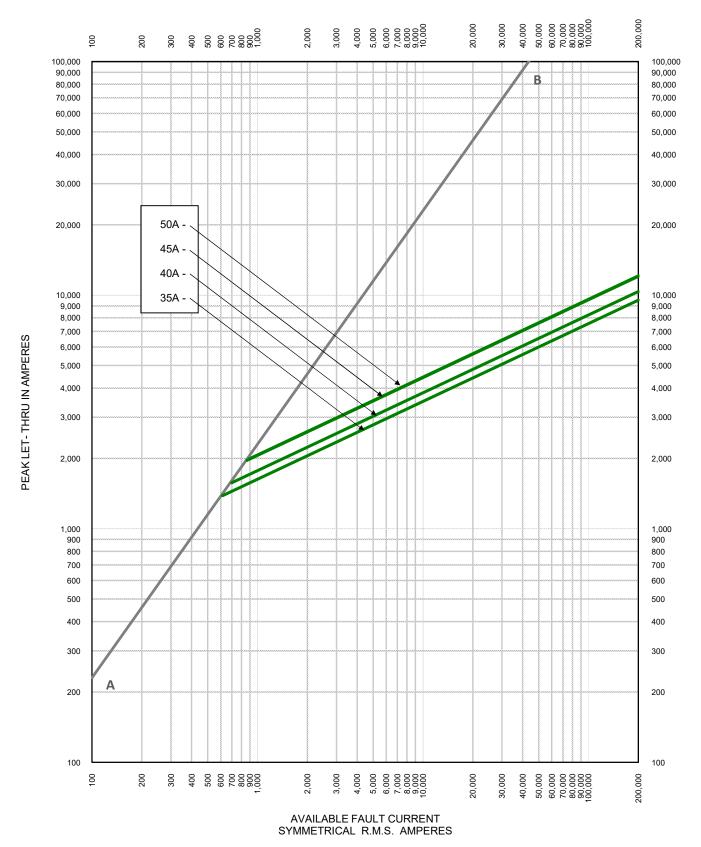

TEST VOLTAGE:

BASIS FOR DATA: AB = 15% Power Factor

LITTELFUSE, INC.
CHICAGO, IL. USA


PEAK LET-THRU CHARACTERISTIC CURVES

FUSE CATALOG NUMBER:

JTD & JTDID 35A - 600A

DRAWN BY: LLL
DATE: 09/23/2019
REVISION: D

DRAWING NO.: SHEET 3 OF 6
FCC05-JTD

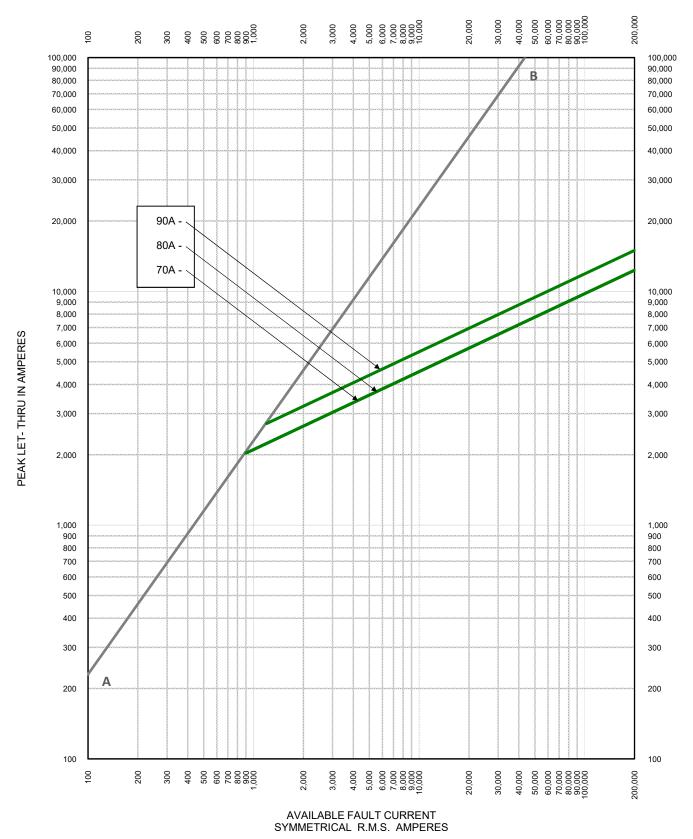

TEST VOLTAGE:

BASIS FOR DATA: AB = 15% Power Factor

LITTELFUSE, INC.
CHICAGO, IL. USA


PEAK LET-THRU CHARACTERISTIC CURVES

FUSE CATALOG NUMBER:

JTD & JTDID 35A - 600A


DRAWN BY: LLL
DATE: 09/23/2019
REVISION: D

DRAWING NO.: SHEET 4 OF 6
FCC05-JTD

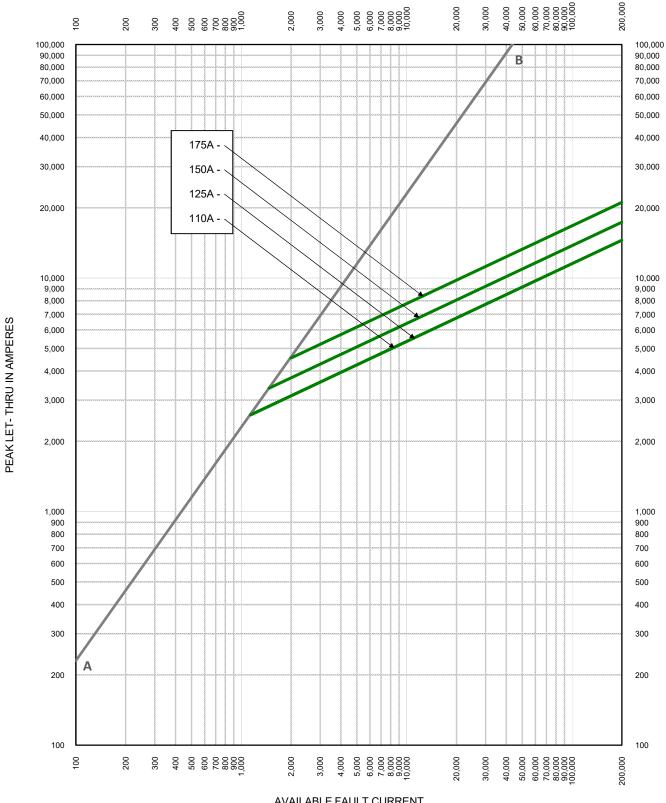

AVAILABLE FAULT CURRENT SYMMETRICAL R.M.S. AMPERES

TEST VOLTAGE:	TIME CONSTANT/POWER FACTOR:	FUSE CATALOG NUMBER:	
BASIS FOR DATA: AB = 15% Power Factor		JTD & JTDID 30A - 600A	
N	LITTELFUSE, INC. CHICAGO, IL. USA	DRAWN BY: LLL DATE: 09/23/2019 REVISION: D	
PEAK LET-THRU CHARACTERISTIC CURVES		DRAWING NO.: SHEET 5 FCC05-JTD	OF 6

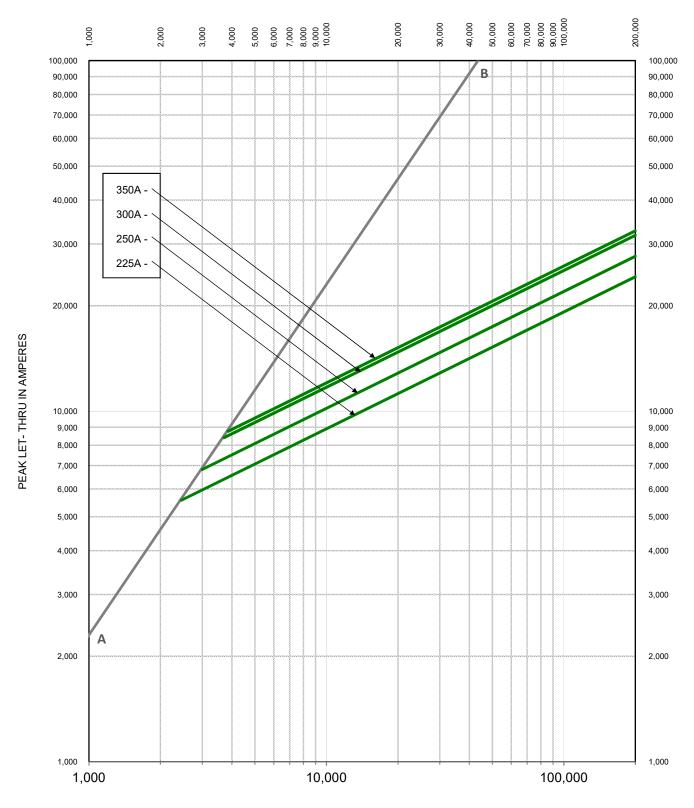

## AVAILABLE FAULT CURRENT SYMMETRICAL R.M.S. AMPERES

TEST VOLTAGE:	TIME CONSTANT/POWER FACTOR:	FUSE CATALOG NUMBER	FUSE CATALOG NUMBER:	
BASIS FOR DATA: AB = 15%	6 Power Factor	JTD & JTDIE	JTD & JTDID 30A - 600A	
1	LITTELFUSE, INC. CHICAGO, IL. USA	DRAWN BY: LLL DATE: 09/23/2019 REVISION: D		
PEAK LET-THRU CHARACTERISTIC CURVES		DRAWING NO.: FCC0	SHEET 6 OF 6	